



Patio500™


2015-2016

61" / Nominal 17.5 oz. per square yard. Put up on approximately 50 yard rolls.

Patio 500 is vinyl laminated to a 100% polyester weft inserted warp knit scrim. It has very good UV, and mildew resistance along with exceptional dimensional stability, tensile and tear strength. Patio 500 is backed by a five year limited warranty (excludes pattern 513 Clear).

Patio 500 fabrics are heat sealable and accept many types of graphics, including heat sealed inset fabric, sewn in inset fabric, silk screening, hand painting, and appliqué. Pressure sensitive adhesive vinyl graphics are not recommended.

Flame resistance meets or exceeds the standards of California Fire Marshal, NFPA 701 TM2, and ASTM E-84, Class A.

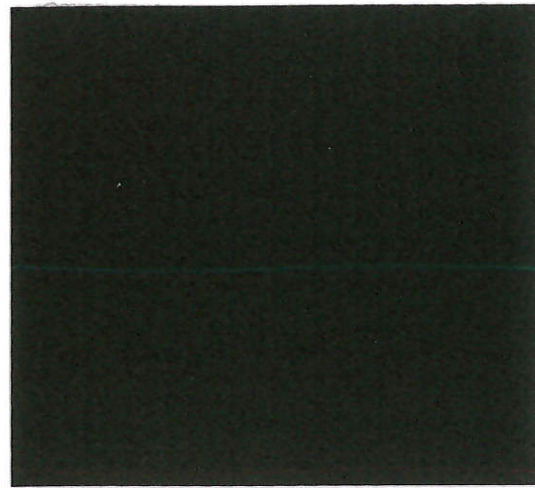

858508
508 BLACK



858513
513 CLEAR



858523
523 WHITE



858541
541 DESIGNER WHITE



858524
524 EGGSHELL



858522
522 BEIGE



858538
538 PARCHMENT




858537
537 CHAMPAGNE




858540
540 TIMBER



858528
528 PEWTER



858506
506 SLATE GRAY




858515
515 BUFF



858566
566 SUNFLOWER



858564
564 TEAL



858514
514 LIME GREEN



858567
567 JADE



858543
543 SPRUCE



858510
510 DARK GREEN



858562
562 EMERALD



858570
570 SUMMER IVY



858565
565 REEF BLUE



858539
539 BAY BLUE




858503
503 ROYAL BLUE



858518
518 DUSKY BLUE



858536
536 COBALT BLUE



858527
527 BURGUNDY




858545
545 RUBY PREMIUM



858529
529 BRIGHT RED PREMIUM




858526
526 TERRA COTTA



858544
544 SUNSET ORANGE PREMIUM



858516
516 BROWN



858525
525 ENGLISH BROWN

Patio 500™ Duplex Patterns


Solid topside with Linen print underside.

TOP

UNDERSIDE



858580
580 EMERALD/EGGSHELL DUPLEX

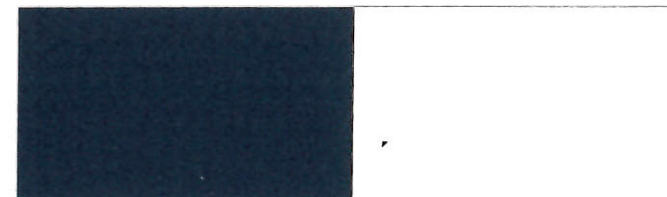

858581
581 COBALT/EGGSHELL DUPLEX



858587
587 ENGLISH BROWN/EGGSHELL DUPLEX



Care and Cleaning Awning Fabric

Patio 500® Awning Fabric is a polyester reinforced PVC fabric that will provide many years of satisfactory service. It is waterproof, flame, mildew, stain and dirt resistant. Patio 500® is dimensionally stable. Properly fastened to the frame, it will retain its trim fit as well as its protective function and aesthetic value. Since no material is impervious to all hazards, proper maintenance is important if maximum life of the product is to be realized. The following maintenance suggestions are offered:

1. Keep clean. Occasional hosing with clear water will prevent dirt accumulation. Most dirt accumulation can be removed by mild soap, water and a soft scrub brush. Rinse thoroughly. In extreme cases, most dirt can be removed by applying half strength bleach and brushing softly to cover thoroughly the necessary area. Allow solution to remain for two or three minutes, then thoroughly rinse with clear water, protecting surrounding materials or plant growth that might be damaged by the bleach.
2. In areas particularly conducive to mildew, brush away any visible accumulation of dirt on underside. Mildew can grow on dirt, but does not grow on or attack the Patio 500® vinyl.
3. Use care during installation, take down and transporting. Frictional heat, particularly at the folds, can damage the surface. Sufficient frictional heat can create holes.
4. Avoid excessive wind whip or flapping. Normally fastened sections or panels should be rolled or restrained when not in use.

"The information contained in this bulletin is believed to be reliable. It is offered in good faith and intended for use as a general guide. Herculite makes no guarantee of results and assumes no obligation or liability whatsoever in connection with the possible use of this information. This bulletin, including any statements concerning the possible use of our products, is not a license to operate under, or intended to suggest infringement of any existing patents."



P.O. Box 435, Emigsville, PA 17318 USA
717-764-1192 800-772-0036 Fax: 717-764-5211
www.herculite.com EMAIL: customercare@herculite.com

Patio 500®

Specifications

Description:	Vinyl laminated on a woven synthetic fabric.
Weight:	17.5 oz. per lineal yard
Width:	61 inches / 154.94 centimeters
Transparency:	Opaque (some light color shades do offer illumination)
Abrasion Resistance:	Excellent
Dimensional Stability:	Excellent
Flexibility:	Excellent in both hot and cold environments
Flame Resistance:	Meets California State Fire Marshall Title 19, NFPA-701-99 (Large Scale) ASTM E84-81A Flame Spread Rating Class A (15)
Mildew Resistance:	Excellent
Chemical Resistance:	Excellent
Water Repellency:	Excellent – Water Proof
Oil Resistance:	Excellent
Sewability:	Excellent
Heat Sealability:	Excellent. Can be sealed by hot air weg welder or radio frequency bar type.



Powered by Innovation ♦ Proven by Performance

P.O. Box 435, Emigsville, PA 17318 USA

717-764-1192

800-772-0036

Fax: 717-764-5211

www.herculite.com

EMAIL: customercare@herculite.com

Patio 500™ Limited Warranty

Patio 500™ Awning Fabrics are warranted for a period of five (5) years from date of original installation against rot or excessive deterioration, excessive loss of strength or color change if they occur in normal use and exposure, including sunlight and normal atmospheric chemicals. (Some color change is unavoidable due to ultraviolet rays and chemicals in the atmosphere.)

In the unlikely event of failure of fabric during the five (5) year period from date of original installation, we will supply you, the original owner or the provider of your protective fabric accessories with replacement fabric at no charge.

This warranty protects you against damage to the fabric accessories used under normal conditions. It does not cover damage to the fabric from acts of God, vandalism, neglect or improper use.

This warranty is in lieu of all warranties expressed or implied, and, Herculite Products Inc. will not be liable for any consequential or incidental damage. Any implied warranties imposed by law are limited in time to the duration of the expressed warranty.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damage, so, the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.



HERCULITE®

P.O. Box 435, Emigsville, PA 17318 USA

717-764-1192

800-772-0036

Fax: 717-764-5211

www.herculite.com

EMAIL: customercare@herculite.com